


Patch Cable RJ45 FlexBoot Cat. 6A ISO/IEC, Shielded

IN STOCK

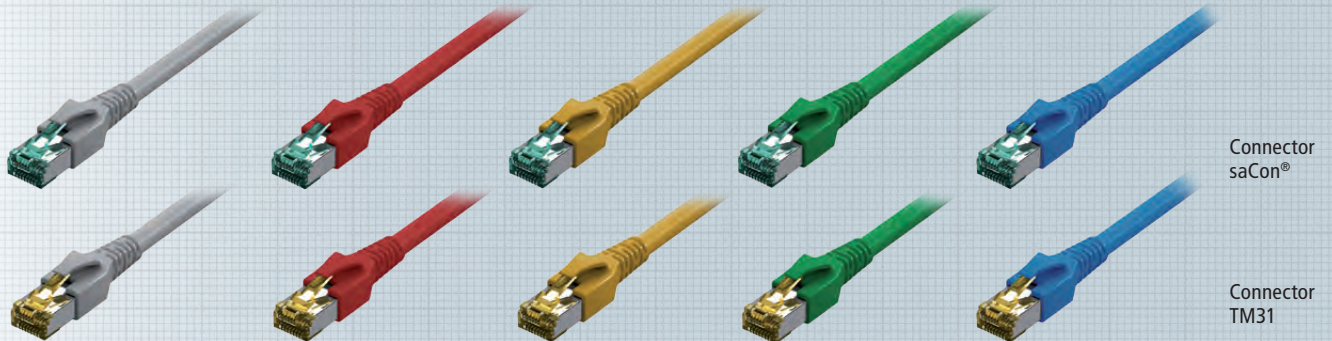

Connector saCon®

Connector TM31

Connection cable RJ45/RJ45, shielded 1:1 pinout with saCon® connector and FlexBoot boot. This patch cable is suitable for installations in offices and data centers. Service mapping may also be effected at a later point in time via the application of color coding (special accessory).

Standards:

IEEE 802.3; 10BaseT; 100BaseT; 1000BaseT; 10GBaseT;
IEEE 802.5 16MB; ISDN; ATM; Telephone

Properties:

Sheath	FRNC: IEC 60332-1-2; IEC 60754-2; IEC 61034
Boot color EMC	yellow, green, blue, red, magenta, orange PiMf / Connector conforms to EN 60603-7 with 360° shielding
Approved connectors Electrical specifications	saCon®, TM31, Cat. 6A 2nd FPDAM 2 to ISO/IEC 11801 AMD 2 (2009-04)
Chemical properties	Free of hazardous substances pursuant to RoHS 2002/95/EC
Packaging unit	up to 3m in length: 10 units in polybag; 3.01 - 5m in length: 5 units in polybag; over 5m: packed individually
Length key	last four digits in ordering code = length of cord in dm

Description	Ordering Code
Patch cable Cat. 6A, saCon® Connector 1:1 FlexBoot, gray	CP1KABABAxxxx
Patch cable Cat. 6A, saCon® Connector 1:1 FlexBoot, red	CP1KRBRBRxxxx
Patch cable Cat. 6A, saCon® Connector 1:1 FlexBoot, yellow	CP1KYBYBYxxxx
Patch cable Cat. 6A, saCon® Connector 1:1 FlexBoot, green	CP1KGBGBGxxxx
Patch cable Cat. 6A, saCon® Connector 1:1 FlexBoot, blue	CP1KBBBBBxxxx

xxxx = length in dm

Description	Ordering Code
Patch cable FlexBoot Cat. 6 _A ISO/IEC, Hirose TM31 1:1, gray	CP1KALALxxxx
Patch cable FlexBoot Cat. 6 _A ISO/IEC, Hirose TM31 1:1, red	CP1KRLRLRxxxx
Patch cable FlexBoot Cat. 6 _A ISO/IEC, Hirose TM31 1:1, yellow	CP1KYLYLYxxxx
Patch cable FlexBoot Cat. 6 _A ISO/IEC, Hirose TM31 1:1, green	CP1KGLGLGxxxx
Patch cable FlexBoot Cat. 6 _A ISO/IEC, Hirose TM31 1:1, blue	CP1KBLBLBxxxx

xxxx = length in dm